TP-LINK®

Gigabit PCI Network Adapter

TG-3269



10/100/1000M PCI Adapter

Complies with
IEEE 802.3/802.3u/802.3ab
Ethernet Standard

Easy installation, spports drivers for most popular OS








Description:

TG-3269 is a 10/100/1000Mbps, 32-bit 33/66MHz PCI-bus Gigabit Ethernet adapter. With single UTP/STP and the Auto-Negotiation (Nway) function support, the Card can auto-negotiate 10Mbps, 100Mbps or 1000Mbps speed, and half or full duplex mode with its link partner (a hub, for example). Supports ACPI, compliant with PCI2.2. Full range of drivers are provided for major Operating Systems

Specifications:

	Standards and Protocols	IEEE 802.3, 802.3u, 802.3ab, 802.3x, 802.1q, 802.1p CSMA/CD, TCP/IP, PCI Revision 2.1/2.2
	Interface	32-bit PCI
	Transmission Rate	10/100Mbps for Half-Duplex mode 20/200/2000Mbps for Full-Duplex mode
	Flow Control	IEEE 802.3x Flow Control (Full-Duplex)
	Jumbo Frame	7680Bytes
	Port	10/100/1000Mbps RJ45
	Slot	1 BOOTROM slot
	Network Media	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 1000 STP (maximum 100m) 100BASE-TX: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 1000 STP (maximum 100m) 1000Base-T: UTP category 5, 5e cable (maximum 100m)
	LED Indicator	1000M Link/Act, 100M Link/Act, 10 Link/Act, Duplex
	Safety & Emission	FCC, CE
	Environment	Operating Temperature: $0^{\circ}\text{C} \sim 40^{\circ}\text{C} (32^{\circ}\text{F} \sim 104^{\circ}\text{F})$ Storage Temperature: $-40^{\circ}\text{C} \sim 70^{\circ}\text{C} (-40^{\circ}\text{F} \sim 158^{\circ}\text{F})$ Operating Humidity: $10\%\sim90\%$ non-condensing Storage Humidity: $5\%\sim90\%$ non-condensing
	Operating System	Windows 7/Vista/XP/2000, Linux

Diagram:

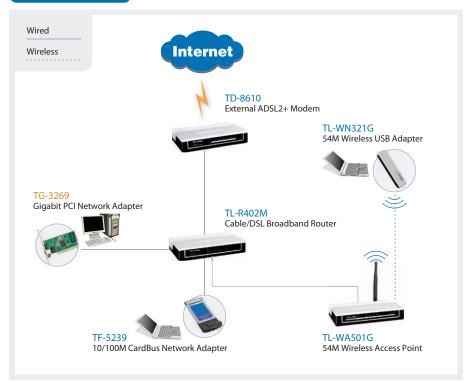

Features:

- Supports 32-bit 33/66MHz PCI Bus
- Supports 10/100/1000Mbps Nway Auto-Negotiation
- Supports 10/100Mbps full and half duplex, 1000Mbps full duplex
- Supports Full Duplex Flow Control (IEEE 802.3x)
- Supports IEEE 802.1P, IEEE 802.1Q VLAN tag
- Supports Jumbo Frame
- Supports Auto-MDI/MDIX
- Provides Bootrom slot, supporting remote boot
- Supports ACPI, PCI power management
- Contain two large independent receive and transmit FIFOs
- One STP/UTP connector
- Provides LEDs to indicate network Link/Activity/Speed/Duplex
- Plug and Play

Package:

Gigabit PCI Network Adapter
TG-3269

One Resource CD , including:

- Drivers
- User Guide
- Other Helpful Information

Related Products:

- External ADSL2+ Modem TD-8610
- 54M Wireless Access Point TL-WA501G
- 54M Wireless USB Adapter TL-WN321G
- Cable/DSL Broadband Router TL-R402M

Specifications are subject to change without notice. TP-LINK is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specificationsmay be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies Co., Ltd.