



## UTP CAT. 3 - 6060

### ***I. Description Non-Plenum***

6 pair UTP (unshielded twisted pair) cable,  
24 AWG stranded bare copper,  
Polyolefin insulated singles, ripcord,  
flexible PVC jacket.  
Jacket is sequentially marked at one  
meter intervals.

### ***II. Applications***

Supports voice applications

### ***III. Physical Characteristics***


Temperature Range: -20 to 80°C  
Insulation Material: Polyolefin  
Jacket Material: PVC  
Applicable Specifications:  
ANSI/TIA/EIA-568-B.2 Category 3  
Flame Rating and Test:  
UL Type CM, UL 1581 Vertical Tray  
C(UL) Type CM, CSA FT1

### ***IV. Color Code***

1 White/Blue Stripe & Blue/White Stripe  
2 White/Orange Stripe & Orange/White Stripe  
3 White/Green Stripe & Green/White Stripe  
4 White/Brown Stripe & Brown/White Stripe  
5 White/Gray Stripe & Gray/White Stripe  
6 Red/Blue Stripe & Blue/Red Stripe

### ***V. Electrical Characteristics***

Typical Operating Voltage: 12 / 24 V DC  
Nom. Velocity of Propagation: 70%

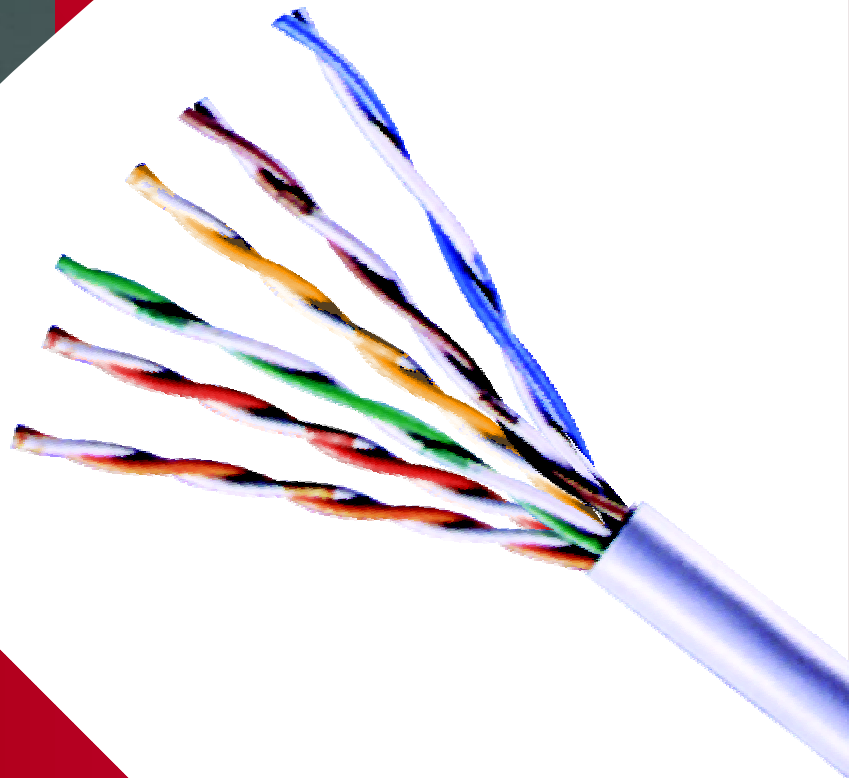

[www.dixon-link.com](http://www.dixon-link.com)