


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	OWN	APVD
CE	16	B3	REVISED PER ECO-11-005139	25MAR11	RK HMR

- 1. SEE TABLE FOR MAXIMUM INSERTION LOSS AT 1310nm.
- 2. MINIMUM RETURN LOSS: 55dB
- 3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702.

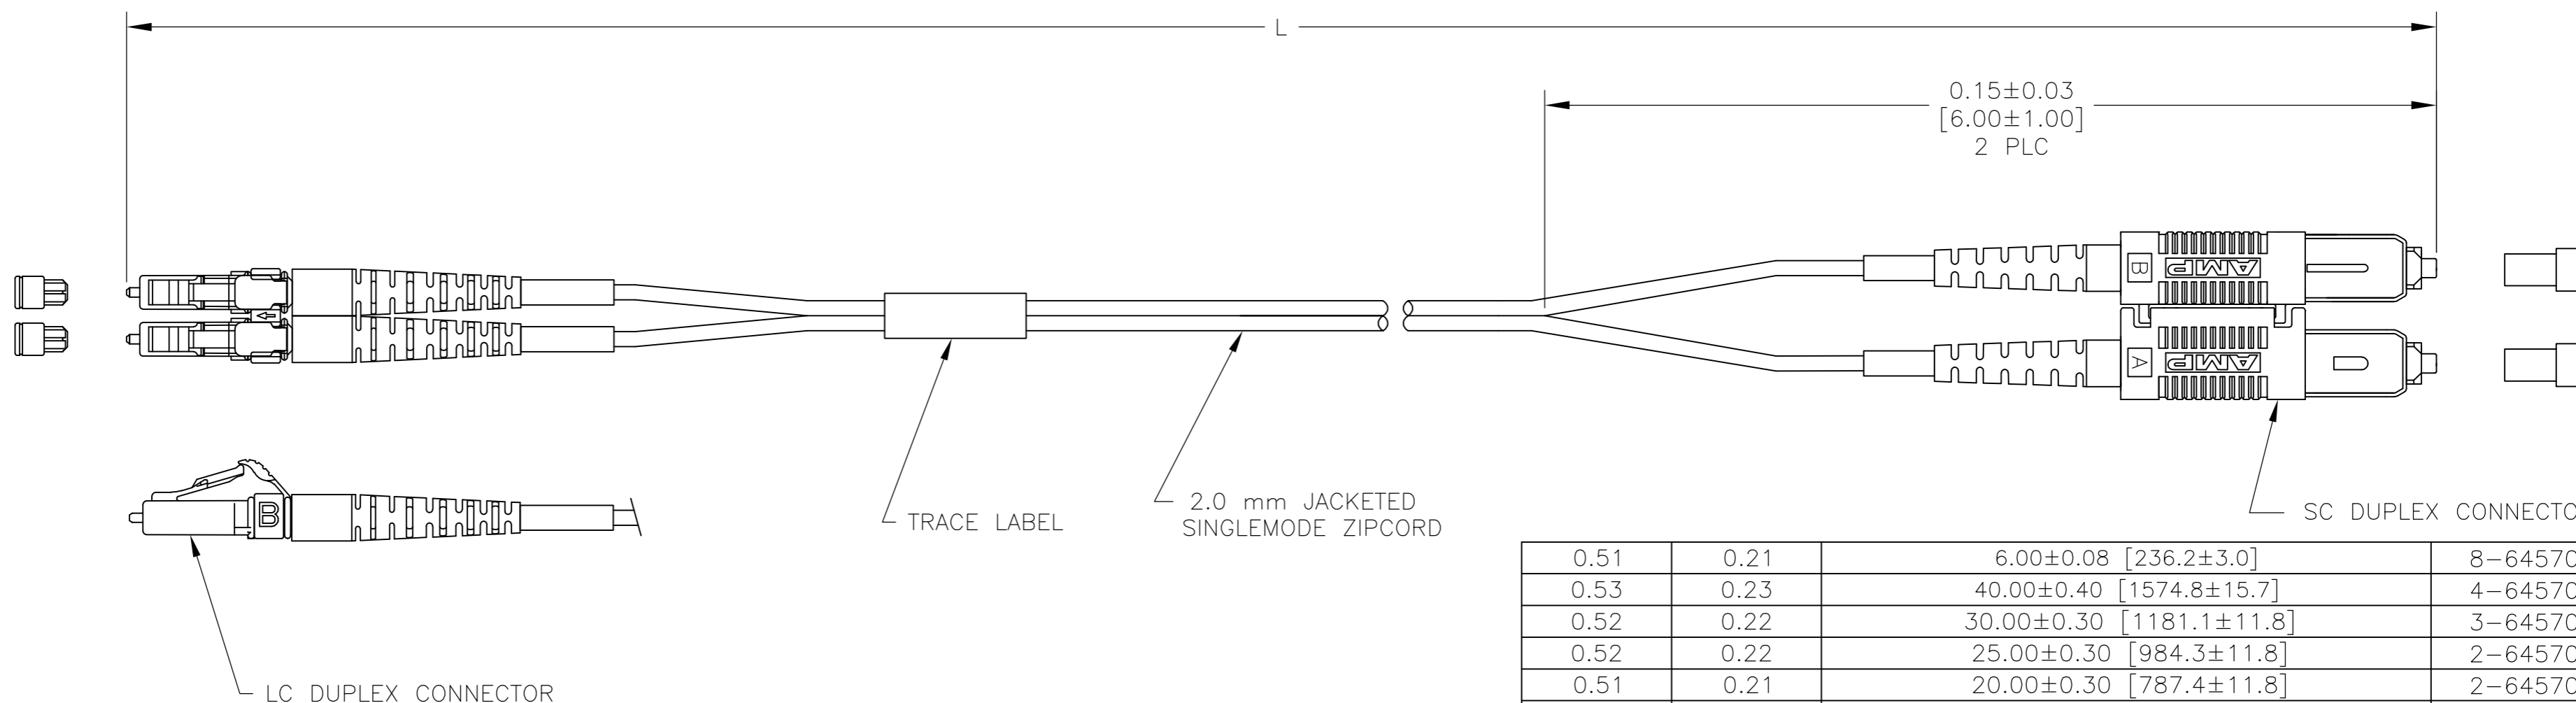

0.51	0.21	6.00±0.08 [236.2±3.0]	8-6457072-0
0.53	0.23	40.00±0.40 [1574.8±15.7]	4-6457072-0
0.52	0.22	30.00±0.30 [1181.1±11.8]	3-6457072-0
0.52	0.22	25.00±0.30 [984.3±11.8]	2-6457072-5
0.51	0.21	20.00±0.30 [787.4±11.8]	2-6457072-0
0.51	0.21	15.00±0.15 [590.6±6.0]	1-6457072-5
0.51	0.21	12.00±0.15 [472.4±6.0]	1-6457072-2
0.51	0.21	11.00±0.15 [433.1±6.0]	1-6457072-1
0.51	0.21	10.00±0.15 [393.7±6.0]	1-6457072-0
0.51	0.21	8.00±0.15 [315.0±6.0]	6457072-8
0.50	0.20	1.50±0.05 [59.1±2.0]	6457072-7
0.50	0.20	0.222 +0.038/-0.0 [8.00 +1.50/-0.0]	6457072-6
0.50	0.20	5.00±0.08 [196.9±3.0]	6457072-5
0.50	0.20	4.00±0.08 [157.5±3.0]	6457072-4
0.50	0.20	3.00±0.05 [122.8±2.0]	6457072-3
0.50	0.20	2.00±0.05 [78.7±2.0]	6457072-2
0.50	0.20	1.00±0.05 [39.4±2.0]	6457072-1
MAX IL SC	MAX IL LC	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN KATHY HE 29SEP05	 TE Connectivity
CHK RICHARD ZHAO 29SEP05	
APVD J. DUNCAN 29SEP05	
NAME CABLE ASSEMBLY, FIBER OPTIC LC TO SC DUPLEX, SINGLEMODE	
PRODUCT SPEC	
APPLICATION SPEC	
MATERIAL	FINISH
WEIGHT	
CUSTOMER DRAWING	

SIZE A2	CAGE CODE 00779	DRAWING NO 6457072	RESTRICTED TO
SCALE NTS	SHEET 1 of 1	REV B3	