

Item #	Style	Description	1-9	10-24	25-99	100+
--------	-------	-------------	-----	-------	-------	------

698-960/1710-2700 MHz Omnidirectional DAS Antennas

L-com's HyperLink® omnidirectional antennas for Distributed Antenna Systems (DAS) are used to distribute Cellular and WiFi signals throughout a building or area.

HG72704U	M	3/4 dBi with N Female Connector	46.75	43.01	39.27	CALL
HG72107U-PRO	A	4/7 dBi with N Female Connector	151.79	139.65	127.50	CALL

800-900 MHz Omnidirectional Antennas

HGV-903U	A	3 dBi, N Female Connector	57.15	53.72	50.29	CALL
HGV-906U	A	6 dBi, N Female Connector	64.43	60.56	56.70	CALL
HG906U-PRO	A	6 dBi, N Female Connector	98.75	90.85	82.95	CALL
HG908U-PRO	A	8 dBi, N Female Connector	145.55	133.91	122.26	CALL

1.9 GHz Omnidirectional Antenna

HG1911U-PRO	A	11 dBi, N Female Connector (available in 5-Pack)	87.31	80.33	73.34	CALL
-------------	---	--	-------	-------	-------	------

2.4 GHz Omnidirectional Antennas

HG2408U-NF	B	8 dBi, 12" (30.5cm) Pigtail with N Female Connector	77.95	71.71	65.48	CALL
HG2408U-NM	B	8 dBi, 12" (30.5cm) Pigtail with N Male Connector	77.95	71.71	65.48	CALL
HG2408U-RBP	B	8 dBi, 12" (30.5cm) Pigtail with RP-BNC Plug Connector	77.95	71.71	65.48	CALL
HG2408U-RSP	B	8 dBi, 12" (30.5cm) Pigtail with RP-SMA Plug Connector	77.95	71.71	65.48	CALL
HG2408U-RTP	B	8 dBi, 12" (30.5cm) Pigtail with RP-TNC Plug Connector	77.95	71.71	65.48	CALL
HGV-2402U	D	2 dBi, N Female Connector	37.39	35.15	32.90	CALL
HGV-2404U	D	4 dBi, N Female Connector	43.63	41.01	38.39	CALL
HGV-2406U	D	6 dBi, N Female Connector	50.91	47.86	44.80	CALL
HGV-2409U	D	8 dBi, N Female Connector	58.19	54.70	51.21	CALL
HG2405UP-NF	E	5 dBi, N Female Connector	39.47	37.10	34.73	CALL
HG2407UP-NF	E	7 dBi, N Female Connector	46.75	43.95	41.14	CALL
HG2409UP-NF	E	9 dBi, N Female Connector	54.03	50.79	47.55	CALL
HG2409U	A*	8.5 dBi, N Male Connector	58.19	54.70	51.21	CALL
HG2409UM-RSP	B*	8.5 dBi, Marine, 3ft (0.9m) Pigtail with RP-SMA Plug Connector	124.75	117.26	109.78	CALL
HG2409U-PRO	A*	9 dBi, N Female Connector (available in 5-Pack)	75.87	72.84	69.80	CALL
HG2409UDT-PRO	A	9 dBi, 7 Degree Electrical Down-Tilt, N Female Connector (available in 5-Pack)	81.07	77.83	74.58	CALL
HG2411UDT-PRO	A	11 dBi, 8 Degree Electrical Down-Tilt, N Female Connector (available in 5-Pack)	93.55	89.81	86.07	CALL
HG2412U-PRO	A	12 dBi, 12" (30.5cm) Pigtail w/ N Female Connector ANATEL Certified (available in 5-Pack)	116.43	111.77	107.12	CALL
HG2412UP-NF	E	12 dBi, N Female Connector	60.27	56.65	53.04	CALL
HG2415U-PRO	A	15 dBi, N Female Connector (available in 5-Pack)	129.95	122.15	114.36	CALL

* Similar to this style-see online Data Sheet for details.

2.4 GHz Dual Polarized Omnidirectional Antennas

HG2406DPU	G	6 dBi, Dual Polarity with (2) N Female Connectors, MIMO	129.99	119.59	109.19	CALL
HG2410DPU	G	10 dBi, Dual Polarity with (2) N Female Connectors, MIMO	192.35	176.96	161.57	CALL
HG2413DPU	G	13 dBi, Dual Polarity with (2) N Female Connectors, MIMO	259.95	239.15	218.36	CALL

2.4 GHz Horizontal Polarized Waveguide Omni Antennas

HG2409WU	F	9 dBi, Horizontal Waveguide Omni Antenna, N Female Connector	174.67	160.70	146.72	CALL
----------	---	--	--------	--------	--------	------

2.4-5.8 GHz Dual Band Omnidirectional Antennas

HG2458-06U-PRO	A	6 dBi, Dual Band Omni Antenna, N Female Connector (available in 5-Pack)	103.95	97.71	91.48	CALL
HG2458-09U-PRO	A	9 dBi, Dual Band Omni Antenna, N Female Connector (available in 5-Pack)	116.43	109.44	102.46	CALL
HGV-2458-03U	D	3 dBi, Dual Band, N Female Connector	39.47	37.10	34.73	CALL
HGV-2458-05U	D	5 dBi, Dual Band, N Female Connector	46.75	43.95	41.14	CALL
HGV-2458-07U	D	7 dBi, Dual Band, N Female Connector	54.03	50.79	47.55	CALL

2.6 GHz Omnidirectional Antenna

HG2609U	*	8.5 dBi, N Male Connector	69.63	64.06	58.49	CALL
---------	---	---------------------------	-------	-------	-------	------

* See online Data Sheet for style details.

3.5 GHz Omnidirectional Antennas

HG3509U-PRO	B	9 dBi, N Female Connector	93.55	86.07	78.58	CALL
HG3512UP-NF	B	11.5 dBi, N Female Connector	93.55	87.94	82.32	CALL

4.9-5.8 GHz Omnidirectional Antennas

HGV-4958-04U	D	4 dBi, N Female Connector	29.07	27.33	25.58	CALL
HGV-4958-06U	D	6 dBi, N Female Connector	40.51	38.08	35.65	CALL
HGV-4958-09U	D	9 dBi, N Female Connector	62.35	58.61	54.87	CALL
HGV-4958-12U	D	12 dBi, N Female Connector	81.07	76.21	71.34	CALL

5.1-5.8 GHz Omnidirectional Antennas

HG5158-06UP-NF	E	6 dBi, N Female Connector	51.95	47.79	43.64	CALL
HG5158-09UP-NF	E	8.5 dBi, N Female Connector	58.19	53.53	48.88	CALL

5.1-5.8 GHz Dual Polarized Omnidirectional Antennas

HG5158DP-10U	G	10 dBi, Dual Polarity with (2) N Female Connectors	145.55	136.82	128.08	CALL
HG5158DP-13U	G	13 dBi, Dual Polarity with (2) N Female Connectors	192.35	180.81	169.27	CALL

5.3-5.8 GHz Omnidirectional Antennas


HG5310U	C	5.3 GHz, 10 dBi, N Female Connector	83.15	78.16	73.17	CALL
HG5412U	C	5.4 GHz, 12 dBi, N Female Connector	93.55	89.81	86.07	CALL
HG5806U-PRO	A	5.8 GHz, 6 dBi, N Female Connector (available in 5-Pack)	75.87	72.84	69.80	CALL
HG5809U-PRO	A	5.8 GHz, 9 dBi, N Female Connector (available in 5-Pack)	87.31	83.82	80.33	CALL
HG5808U	C	5.8 GHz, 8 dBi, N Female Connector	82.11	78.83	75.54	CALL
HG5812U-PRO	A	5.8 GHz, 12 dBi, N Female Connector (available in 5-Pack)	98.75	94.80	90.85	CALL

5.8 GHz Omnidirectional Down-Tilt Antenna

HG5811UDT-PRO	A	11 dBi, 8 Degree Electrical Down-Tilt with N Female Connector	91.47	87.81	84.15	CALL
---------------	---	---	-------	-------	-------	------

5.8 GHz Omnidirectional Wireless LAN Antenna

HG5810U	E	10 dBi, Wireless LAN, N Female Connector	93.55	89.81	86.07	CALL
---------	---	--	-------	-------	-------	------

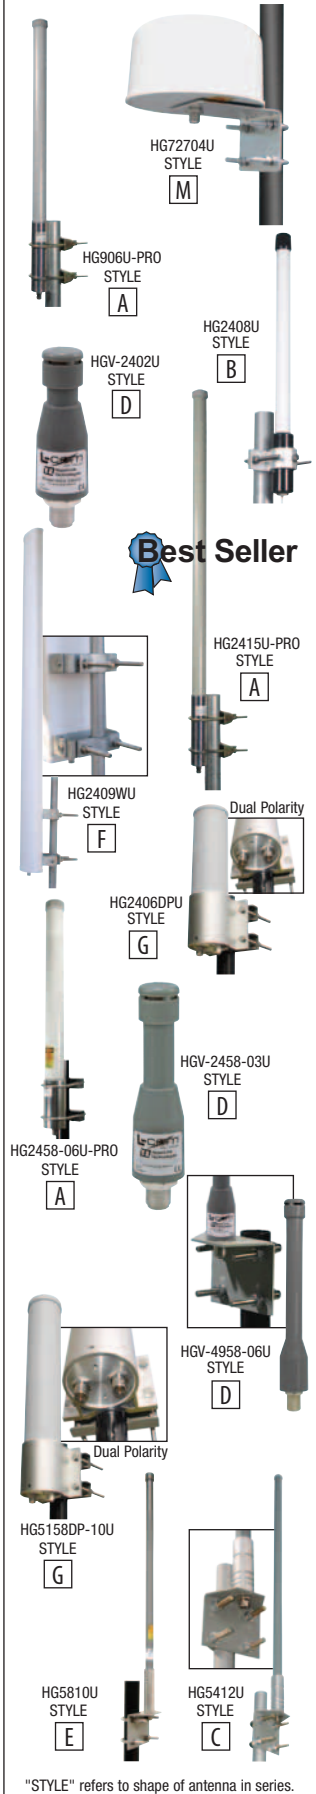

"STYLE" refers to shape of antenna in series.