

CA-DW181RB-VF

720TVL HDIS Day/Night Vandal-proof IR Dome Camera



Features

- 1/3" HDIS
- High resolution of 720TVL
- Day/Night(ICR), AWB, AGC, BLC
- 2.7~12mm vari-focal lens
- Max. IR LEDs length 30m, Smart IR
- IP66, IK10, DC12V

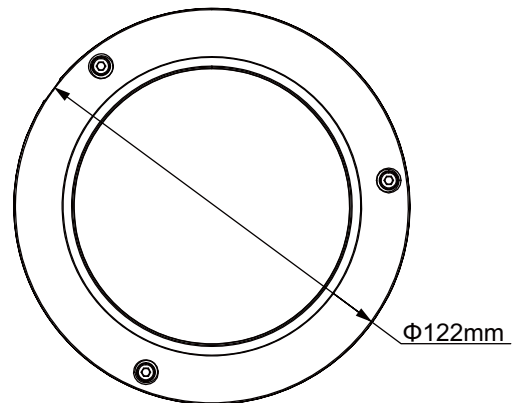
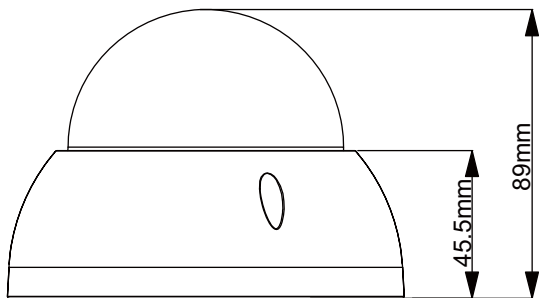
CA-BW181RB-VF

Technical Specifications





| Model | CA-BW181RP-VF | CA-DBW181RN-VF |
|------------------------|---|------------------|
| Camera | | |
| Image Sensor | 1/3" HDIS | |
| Effective Pixels | 960(H)×480(V) | |
| Horizontal Resolution | 720TVL | |
| Electronic Shutter | 1/50s~1/100,000s | 1/60s~1/100,000s |
| Synchronization | Internal | |
| Min. Illumination | 0.02Lux@F1.2(AGC ON), 0Lux IR on | |
| S/N Ratio | More than 65dB (AGC Off) | |
| Video Output | 1Vp-p Composite Output (75Ω/BNC) | |
| Camera Features | | |
| Max. IR LEDs Length | 30m, Smart IR | |
| Day/Night | Auto(ICR) / Color / B/W | |
| Noise Reduction | 2D | |
| Lens | | |
| Focal Length | 2.7~12mm | |
| Angle of View | H: 90° ~28.7° | |
| Lens Type | Manual / Fixed Iris | |
| Mount Type | Φ14 | |
| General | | |
| Power Supply | DC12V±10% | |
| Power Consumption | 3.1W | |
| Working Environment | -40°C~+60°C / Less than 95%RH (no condensation) | |
| Ingress Protection | IP66 & IK10 | |
| Dimensions | Φ122mm×89mm | |
| Weight | 0.45kg | |

CA-DW181RN-VF

Dimensions (mm)



Accessories (optional)

| | | | |
|--|--|---|--|
|  |  |  |  |
| PFA123 | PFA151 | PFA152 | PFB200W |

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology